

Turbulent Transport, Dissipation & Drag

Charles R. Doering
*Department of Mathematics and
Michigan Center for Theoretical Physics
University of Michigan, Ann Arbor*


Outline:

1. Phenomenology, physics & philosophy
2. Mathematical models & methods
3. Conclusions & conundrums

Viscosities of familiar fluids:

<u>Fluid</u>	<u>Density (ρ)</u>	<u>Kinematic Viscosity (ν)</u>
Water (0° C)	$1.0 \times 10^3 \text{ kg/m}^3$	$1.8 \times 10^{-6} \text{ m}^2/\text{s}$
Water (20° C)	$1.0 \times 10^3 \text{ kg/m}^3$	$1.0 \times 10^{-6} \text{ m}^2/\text{s}$
Air (0° C)	1.3 kg/m^3	$1.3 \times 10^{-5} \text{ m}^2/\text{s}$
Air (20° C)	1.2 kg/m^3	$1.5 \times 10^{-5} \text{ m}^2/\text{s}$
Glycerine (20° C)	$1.3 \times 10^3 \text{ kg/m}^3$	$1.1 \times 10^{-3} \text{ m}^2/\text{s}$

Viscosity is the *friction* and the *dissipation* coefficient

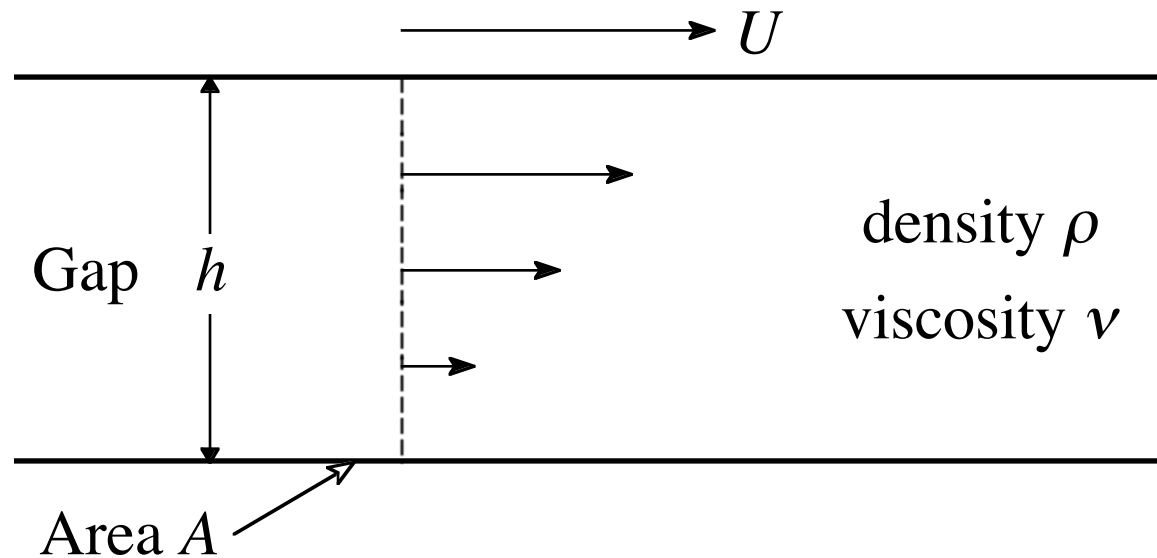

Force required to maintain *laminar* flow: $F = \rho \cdot \nu \cdot (U/h) \cdot A$

Power required to maintain *laminar* flow: $P = F \times U = \rho A h \cdot \nu \cdot U^2 / h^2$

General relationship: $P_{laminar} \sim \text{mass} \times \text{viscosity} \times (\text{stirring rate})^2$

Example: what is the maximum speed V of your car?

Suppose engine power $P = 100$ horsepower $\approx 75,000$ W.



- If drag due to air is *laminar* friction, then
 $P = P_{laminar}$
- Use *spherical approximation* for the car so
 $P_{laminar} = P_{Stokes} = 6 \pi r \rho_{air} v_{air} V^2$
- Therefore, $V_{max} \approx (P/[6\pi\rho_{air}v_{air}r])^{1/2}$
- Use $r = 1$ m as radius of the sphere.
- $V_{max} = 14,000$ m/s = **30,000 mph** !
- *Note:* speed of sound = 350 m/s = **750 mph**

Example: What is the maximum speed V of your car?

Suppose engine power $P = 100$ horsepower $\approx 75,000$ W.



- If drag due to air is turbulent dissipation, then $P = P_{turbulent} = c_D \rho_{air} A V^3$.
- c_D is the **drag coefficient**, depends only on the *shape* of the car.
- $V_{max} \approx (P / c_D \rho_{air} A)^{1/3}$
- Use $A = 1 \text{ m}^2$ and $c_D = .2$ for guesstimate:
- $V_{max} = 66 \text{ m/s} \approx 140 \text{ mph}$
- Compare laminar estimate $V_{max} \approx \text{Mach } 40!$